



PLEASE READ BEFORE USE

integral™ LED

IP20

Integral LED RF RGBW Touch and Button Remote ILRC016

1. INTRODUCTION


The Integral LED RF RGBW touch and button remote is designed to work with the Integral LED RF receiver (ILRC014) and RGBW colour strip. The remote control can be used to control four zones of strip lighting. You will be able to switch on/off, change the colour of the strip in different colour modes and dim the strip to your ideal level for each independent lighting zone. You can change the mood and look of your space instantly.

2. PARAMETER


- Control interface: touch and button control
- Output: RF signal
- Working Voltage: 4.5V (3 x AAA battery / Not included)
- Working Frequency: 868MHz
- For use with ILRC014 RF receiver
- Remote Distance: 20-30 metres
- Control: RGBW colour
- Control Zone: 4 zones synchronously and independently
- IP rating: IP20
- Working Temperature: -20°C to 50°C
- Relative Humidity: 8% to 80%
- Dimensions: L120xW55x17(mm)
- Weight (N.W.): 100g

3. OPERATING INSTRUCTIONS

Front of the remote

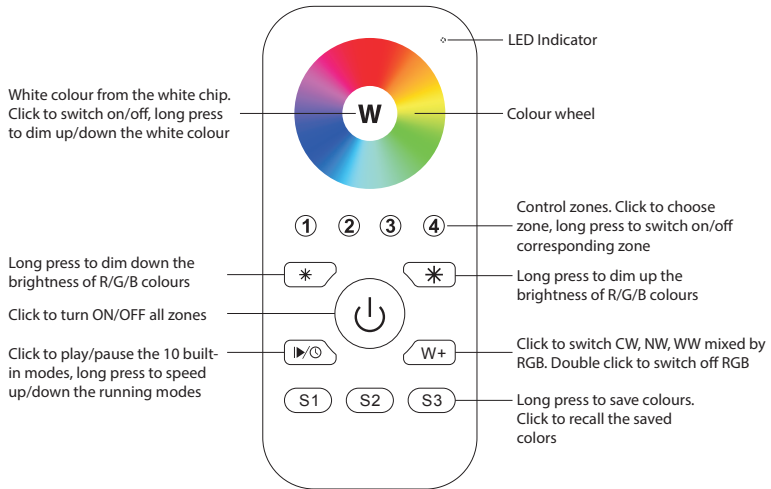


Back of the remote

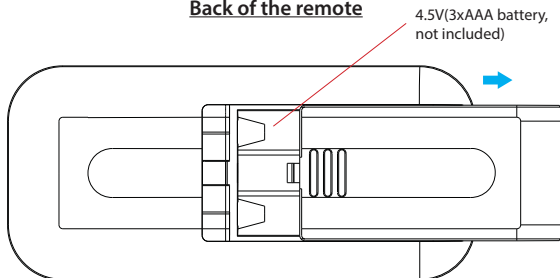

Matching the RF receivers

There are 2 ways to match the receivers.

Option 1: Match the RF receiver **WITH** the "Learning Key" on receiver(s)

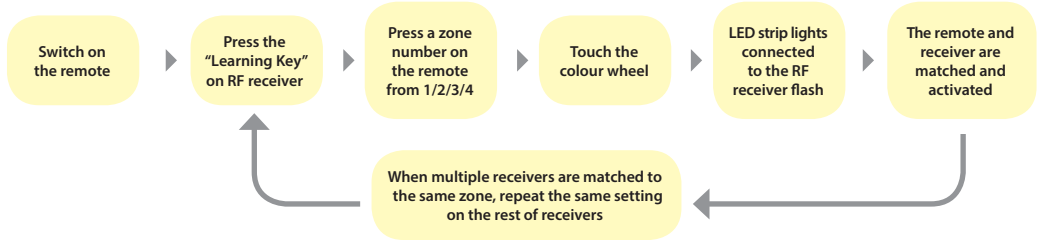

Option 2: Match the RF receiver **WITHOUT** the "Learning Key" on receiver(s)



Note: One receiver can be matched up to max 8 remotes


Cancel the matching: Press "Learning Key" button on the receiver for more than 3 seconds until the LED strip lights connected to the receiver *flash*.

Operating the remote


For all operation on the remote, select a Zone number from 1, 2, 3, and 4 first, then touch the colour wheel or other buttons to set-up the preferred colour or modes.

Using multiple receivers, there are two options to set up

Option 1: Match all receivers to the same zone. For example, match all receivers to zone 1. The LED strips connected to the receivers matching to zone 1 will run the same colour and colour effect.

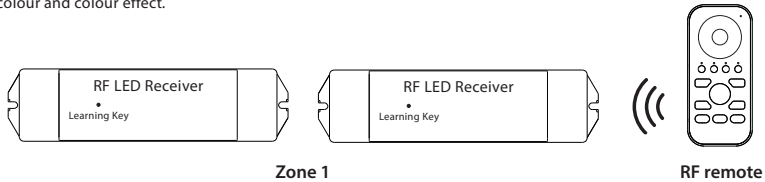

Option 2: Match all receivers to different zones. For example, match receivers to zone 1, 2, 3 or 4. The correspondent LED strips connected to receivers in different zones will run different colours and colour effects based on individual zone setting.

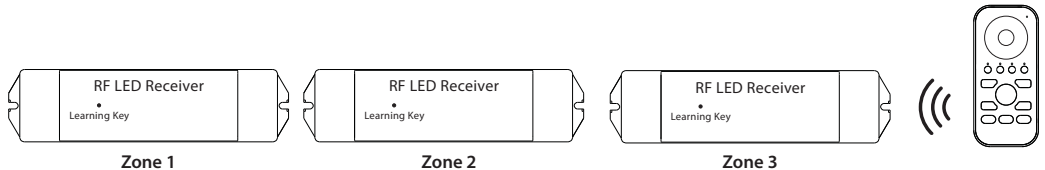

Limited 5-year warranty

This LED Remote control is for indoor use only. Improper installation, abuse or miss-powering of the remote control or failure to use the remote control for its intended use will void the warranty. Proof of purchase is required for all returns. Your statutory rights remain unaffected. Please see www.integral-LED.com/warranty.

Questions? Please contact your supplier or see integral-LED.com



WASTE ELECTRICAL PRODUCTS SHOULD NOT BE DISPOSED OF WITH HOUSEHOLD WASTE. PLEASE RECYCLE WHERE FACILITIES EXIST. CHECK WITH YOUR LOCAL AUTHORITY FOR RECYCLING ADVICE.

Integral LED is a division of Integral Memory plc:
Unit 6 Iron Bridge Close,
Iron Bridge Business Park,
London, NW10 0UF, UK