



RF Single Color Remote Controller

70010015



Important: Read All Instructions Prior to Installation

Function introduction

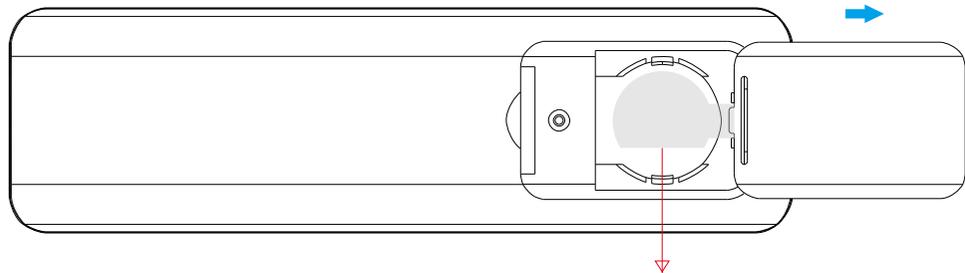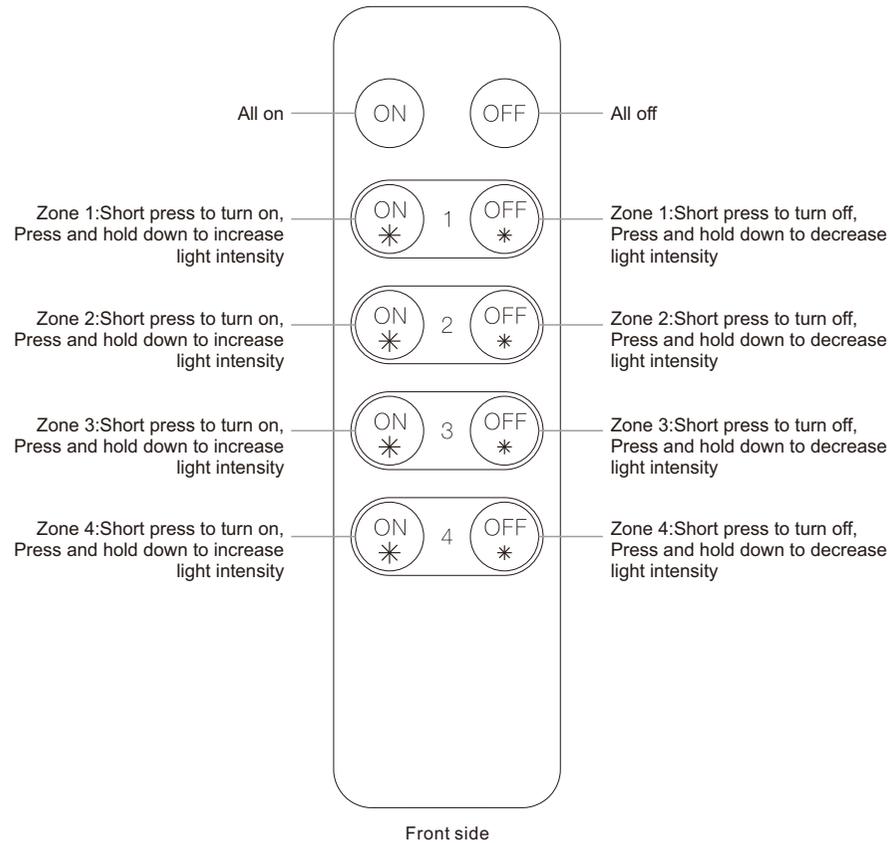

Note: Before the first use, please remove the protective film on the battery.

Back side

Product Data


Output	RF signal
Operation Frequency	868/869.5/916.5/434MHz
Power Supply	3V(1xCR2025 battery)
Operating temperature	0-40°C
Relative humidity	8% to 80%
Dimensions	136.3x38.9x10.7mm

- Control 4 zones of receivers separately
- Single color controller
- Compatible with all universal series RF receivers
- 1 receiver can be paired by max 8 different remote controls.
- Waterproof grade: IP20

Safety & Warnings


- This device contains a button lithium battery that shall be stored and disposed properly.
- DO NOT expose the device to moisture.

Pair with RF receiver

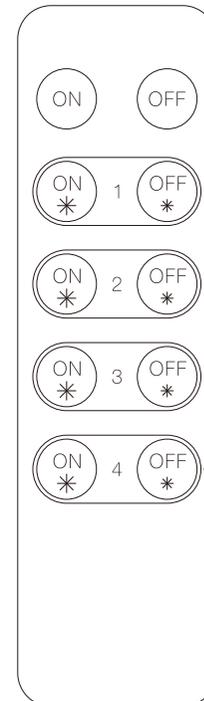

Step 1: Wire the strip to the receiver and set the dip switches of the receiver according to the strip type. Please see instructions of the receiver for more info.

Remove the protective film from the battery compartment of the remote.

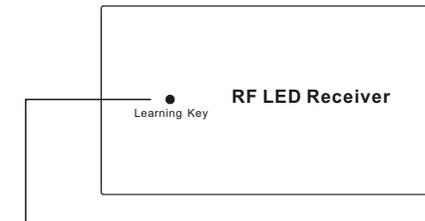

Step 2: Short press the "Learning Key" button on RF receiver or re-power on the receiver three times continuously to set it into pairing status


Step 3: Choose one zone and Short press ^{ON} * or ^{OFF} * of the zone (e.g. zone 4), The LED lights connected with the receiver will flicker once which means the receiver is paired with zone 4 successfully.

After pairing, Short press or hold ^{ON} * or ^{OFF} * of 1/2/3/4 to control each zone separately

Note: one receiver can be paired with max 8 remote controls.

If you use multiple receivers, you have two choices:

Option 1: have all the receivers in the same zone, like zone 1



Option 2: have each receiver in a different zone, like zone 1, 2, 3 or 4



WARNING: This product contains a button battery and should be kept out of reach of children.



WASTE ELECTRICAL PRODUCTS SHOULD NOT BE DISPOSED OF WITH HOUSEHOLD WASTE. PLEASE RECYCLE WHERE FACILITIES EXIST. CHECK WITH YOUR LOCAL AUTHORITY FOR RECYCLING ADVICE.

**Shenzhen Sunricher
Technology Co. Ltd**
Add: 3F, Bldg. E, Qihang
Industrial Park, 1008
Songbai Road, Nanshan
Dis., Shenzhen 518108